


MONUMENT RECORD

Corner ID: **CICr_F09**



West 1/16 Corner

Sections 08 & 17- T07N-R01W, 2nd P.M.
Clear Creek Township, Monroe County, Indiana



MONUMENT: Describe monument set or found (Include material type, scribing, distance above/below grade, dimensions.)
0.3' x 0.35' limestone with cut "+" found 0.2' above grade.

MONUMENT LOCATION SKETCH:

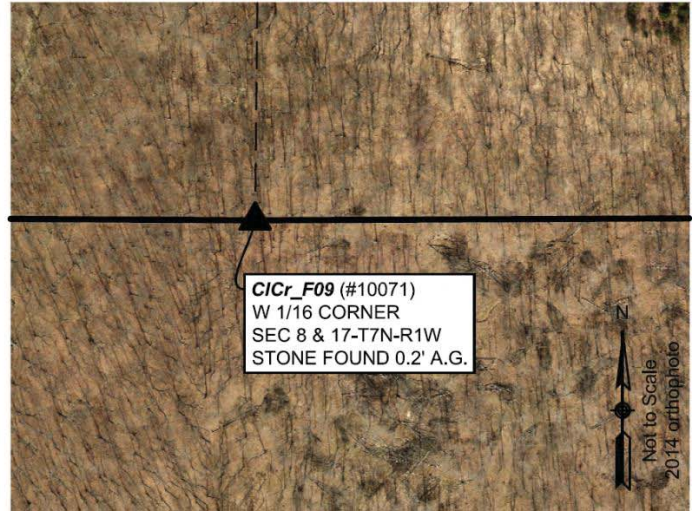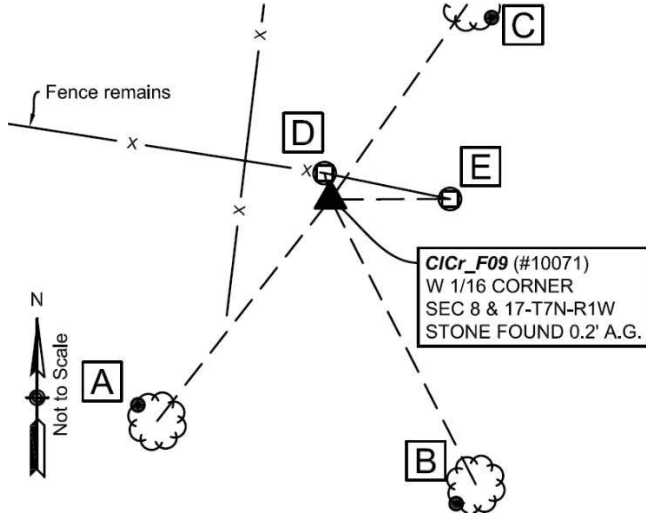

WITNESS MONUMENT TIES: Describe at least three new BT's and/or witness objects established or work done to preserve existing evidence. All ties to new Bearing Trees (BT's) are a mag nail set in a 1-1/2" plastic washer stamped "SURVEY MARKER - DO NOT REMOVE" and hack mark at the root crown (less than 12" above ground) perpendicular to the center of the tree, unless otherwise noted. BT diameters are noted as dbh and are measured approximately 4.5' above ground. Bearings are measured from the monument to the center of the BT, distances are measured from the monument to the mag nail. Distances to witness ties were measured with a Leica Disto laser distance meter. Bearings were collected with the internal magnetic compass of the Javad Triumph LS and were automatically adjusted to grid north.

ID	Bearing	Distance	Description
A	S 38° W	24.9'	Mag nail and washer set in hack 0.5' a.g. in the northwest side of a 16" shagbark hickory
B	S 27° E	28.3'	Mag nail and washer set in hack 1.1' a.g. on the southwest side of a 10" tight-bark hickory
C	N 35° E	21.3'	Mag nail and washer set in hack 0.8' a.g. in the southeast side of a 12" tight-bark hickory
D	N 12 °W	2.4'	Mag nail and washer set 0.8' a.g. in the southwest side of a 9" round wood post
E	S 89° E	10.6'	Mag nail and washer set 0.6' a.g. in the south side of a 6" dia. round wood post

PHOTO IDENTIFIED: Photo Date: 11/29/2018



Photo Orientation & Description: CICr_F09



Photo Orientation & Description: Looking W at CICr_F09



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us

Page 1 of 3

MONUMENT RECORD

Corner ID: **CICr_F09**

West 1/16 Corner

Sections 08 & 17- T07N-R01W, 2nd P.M.
Clear Creek Township, Monroe County, Indiana




Photo Orientation & Description: Looking NE at CICr_F09



Photo Orientation & Description: Looking SE at CICr_F09

EXISTING SURVEY HISTORY *Include as much detail and history of the corner as known at the time of perpetuation*

ORIGINAL GOVERNMENT SURVEY:

Year Surveyed: Not an original government corner By:

Where filed or recorded:

Original monument:

Bearing Trees or Reference Monuments:

Species	Dia.	Bearing	Distance

Notes:

SUBSEQUENT CORNER RESTORATION:

Date Surveyed: 1/25/1985 By: Edmund Farkas, MCS

Where filed or recorded: Monument Record

Original monument: Found limestone

Bearing Trees or Reference Monuments:

Species	Dia.	Bearing	Distance
Shag Hickory	14"	S 47°30' W	24.84'
Shag Hickory	12"	N 12°30' E	14.35'
Shag Hickory	11"	N 61° 30' E	19.56'

Notes: See archived monument record

ORIGINAL OR SUBSEQUENT SURVEY EVIDENCE FOUND: *Include, search area or areas, search procedure, etc.*

Date of Search: 11/29/2018 By: R.Oser & C.Raley Monument Found: limestone BTs or Reference Objects Found: We found the 14" shag bark hickory noted on the Farkas Monument Record, but we did not find the old pk nail Project #: T07NR01W08 Field Book: 52, pgs. 64 & 79 Notes:

OTHER SURVEY HISTORY: *Include details such as surveyor name, date, recording info, monument description, etc.*

This stone was accepted by Lee Utt on his 8/5/1983 survey in Sections 7 and 8 -T7N-R1W for Ora Shields, on file as Reference Survey ID001110.

OTHER EVIDENCE: *Describe corner location relative to nearby features and how to reach the corner location – note fences, roads, timber cutting lines, mow lines, clearings, plantings, streams, topo changes, etc.*

The stone was found firmly planted with a 1" iron pipe on the south side 1.6' above grade. Intermittent north, south, west, and east fence remains were found in the vicinity of the stone, with the east/west remains ~2.5' north and the north/south remains ~8' west.

MONUMENT PRESERVATION: *Describe work done to preserve existing monument.*

We set a five-foot t-post 0.4' northwest of the stone with a Monroe County "PROTECT NEARBY SURVEY MARKER" sign attached 2.5' above grade facing south. We tested the stone with hydrochloric acid to confirm the presence of carbonate minerals before we tied orange flagging around it and spray painted it orange.

THEORY OF LOCATION: *Describe the theory of location for acceptance of this monument. Include monument origin and associated uncertainty.*
The origin of this stone is unknown. It was accepted as the best evidence of the corner with no associated uncertainty.

GEODETIC COORDINATES: Northing: 1384899', Easting: 3104401'

BASIS OF GEODETIC COORDINATES: The basis of bearings is Grid North System NAD83 (2011)/Indiana West NAVD 88, Epoch 2010.0000, geoid12b_conus.db3, US Survey Feet. Tied to NSRS using the JAVAD GNSS Data Online Processing Service (DPOS) to post-process static observations collected with a Javad Triumph 2 base. Positional values of this corner were determined from



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us


Page 2 of 3

MONUMENT RECORD

Corner ID: **CICr_F09**

West 1/16 Corner

Sections 08 & 17- T07N-R01W, 2nd P.M.
Clear Creek Township, Monroe County, Indiana



static GNSS and RTK GNSS (Javad Triumph LS Rover) observation.

This document is not complete without the associated Corner Perpetuation plat and report of survey for Section 08-T07N-R01W by Rachel Oser of the Monroe County Surveyor's Office dated April 15, 2019 and recorded as Instrument Number 2019004835 in the office of the Monroe County Recorder.

CERTIFICATIONS:



Rachel Oser

Date: 4/16/2019
Rachel Oser, State of Indiana
Professional Surveyor
No.21100022



Trohn Enright-Randolph

Date: 4/16/2019
Trohn Enright-Randolph
Monroe County Surveyor



Accepted by the Monroe
County Surveyor Review
Board on 4/16/2019



MONUMENT RECORD



STATE OF INDIANA - COUNTY OF MONROE

SECTION 17, TOWNSHIP 7 NORTH, RANGE 1 WEST

MONUMENT DESCRIPTION & REMARKS

FND. LIMESTONE STONE SOLID IN THE GROUND, STONE IS 0.30' X 0.35'
& 0.20' OUT OF THE GROUND. STONE HAS A CHISELED "X" ON THE TOP &
IS 8' EAST OF FENCE TO THE SOUTH & 4' SOUTH OF EAST-WEST FENCE.

RECOVERY TIE DRAWING

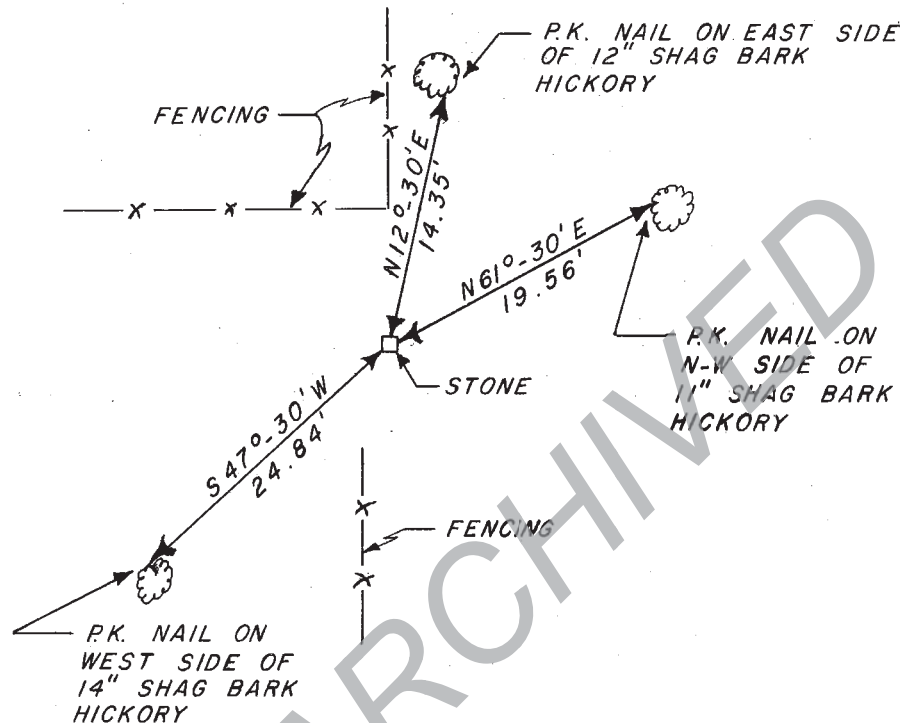

(●) AT CORNER



NOT TO SCALE

STATE OF INDIANA

COUNTY OF MONROE

I, EDMUND O. FARKAS HEREBY CERTIFY THAT THIS DOCUMENT WAS PREPARED UNDER MY DIRECTION IN ACCORDANCE WITH THE PROVISIONS OF SECTION 17-3-64-4 - 17-3-64-8 OF THE INDIANA CODE, BEING ACTS OF 1965, CHAPTER 319; AND THE ABOVE DATA IS GIVEN UNDER MY HAND AND SEAL THIS 25TH DAY OF JANUARY, 19 85 A.D.

SPACE
RESERVED
FOR
RECORDING
OFFICER.

INDIANA REGISTERED LAND SURVEYOR NO. _____

OR _____

UNITED STATES GOVERNMENT AGENCY

TOWNSHIP:
CLEAR CREEK

CORNER I.D.

TITLE _____

F-9